






# LL-1319-13M

**Operating Voltage = DC to 250 Vac**  
**Operating Current (Max)= 13A**  
**Frequency = 50/60 HZ**  
**Temp. Range (Storage) = -40 to 85 C**  
**Temp Range (Operating) @ 12.6 A = -20 to 45 C**  
**Diel. Withstanding Voltage (Ph - Case) = 1500 Vac**  
**Diel Withstanding Voltage (Ph - Ph) = 1500 Vdc**  
**Leakage current @ 250 Vac, 60 HZ = 2.5 MA max.**  
**Discharge Voltage after 60 sec = 34 V max.**  
**Thermal Shock MIL-STD-202, Method 107, Test Condition A,**

**Mechanical Shock MIL-STD-202, Method 213B, Test Condition K**

**Vibration MIL-STD-202, Method 204D, Test Condition B**  
**Moisture Resistance MIL-STD-202, Method 106G**  
**Seal MIL-STD-202, Test Condition D**  
**Calculated MTBF = 2,273,891 hours GB @ 30oC**

**Order P/N LL-1319-13M**

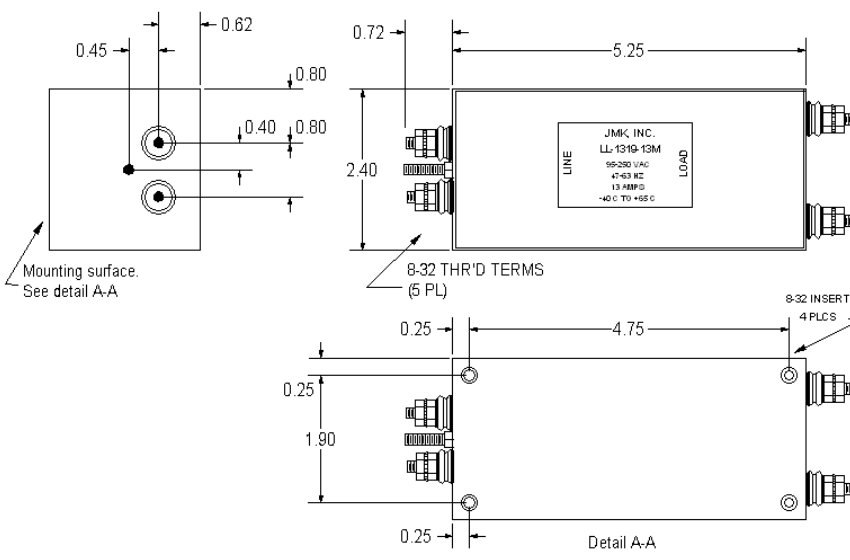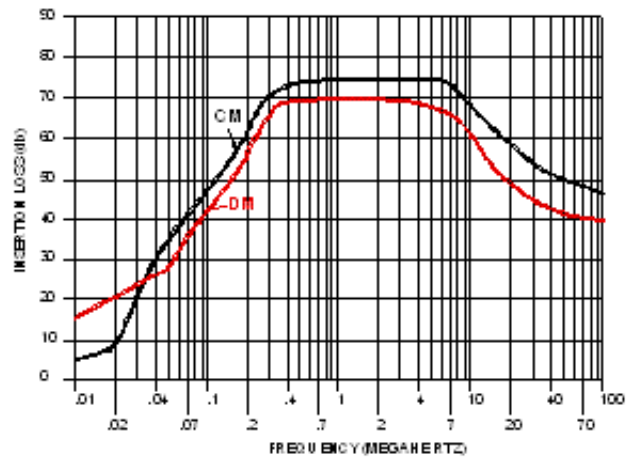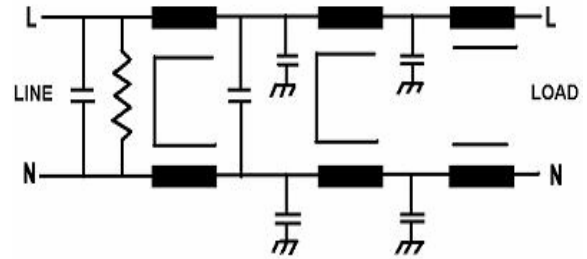

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141- 589- 1884