



AA-2069-1


The AA-2069-1 is a 100 Vdc filter with high common mode and differential insertion loss.

The filter is intended to attenuate high levels of electrical noise, thus preventing the unit for which it providing filtering from interfering with any adjacent hardware.

Adding metal oxide varistors (MOV) on the input and output will also provide significant transient suppression.

The MOVs can be added internally but the length of the filter will have to be increased from 2.00 to 2.50 inches.



Order Part Number: AA-2069-1

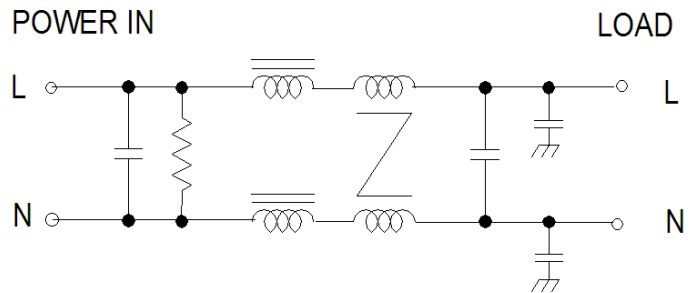

Operating Voltage = _____ 100 VDC
 Operating Current = _____ 1.0 Amp
 Operating Temperature = _____ -20°—60°C
 Storage Temperature = _____ -40°—85°C

Diel. Withstanding (line - case) = __1500 Vdc for 1.0 Min

INSERTION LOSS vs. FREQUENCY

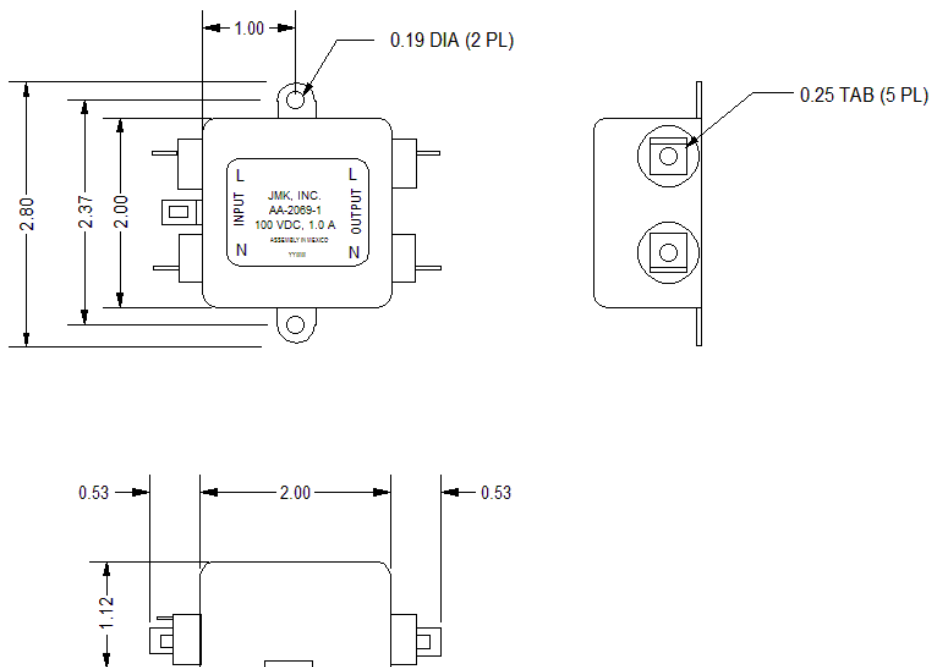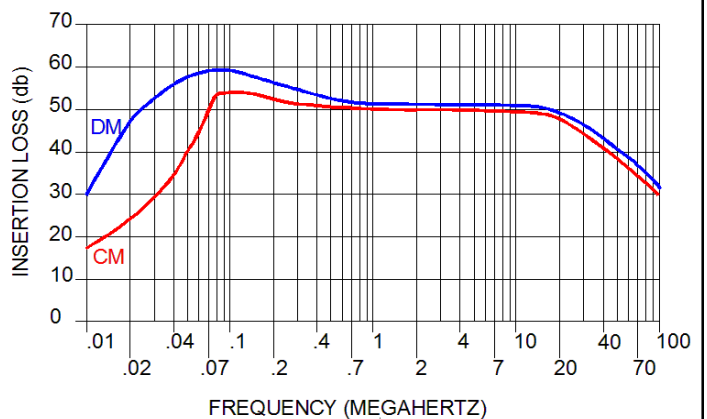

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884