




ZF-1519-3

The ZF-1519-3 filter is configured to work with systems that need to meet MIL-STD-461D, E or F.

The filter is designed with "Feed-Through Capacitors" so that the minimum common mode insertion loss of 60 db can be maintained out to the frequency of 1Ghz and beyond.

If more stringent environmental characteristics are needed, this filter can be adapted with minimal design changes.





Order P/N: ZF-1519-3

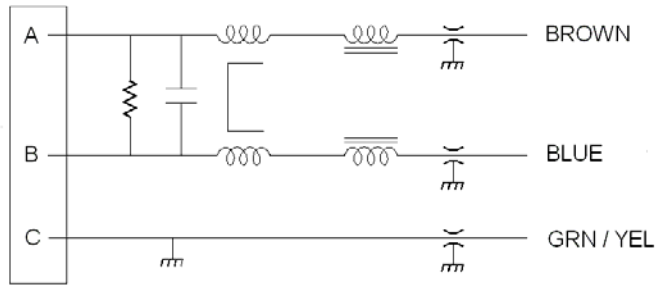

Operating Voltage = _____ 115/240 Vac
 Operating Current Max = _____ 3.0 Amp
 Operating Frequency = _____ 50—400 Hz
 Operating Temperature = _____ -20 to 50°C
 Diel. Withstand (Line to Case) = _____ 1500V~ for 1 Min
 Diel. Withstand (Line to Line) = _____ 1500Vdc for 1 Min

Leakage Current = _____ 1.2 ma @ 250 VAC, 60Hz
 Discharge after 1.0 sec. = _____ 34 V Max

Calculated MTBF = _____ 2,460,527 Hrs

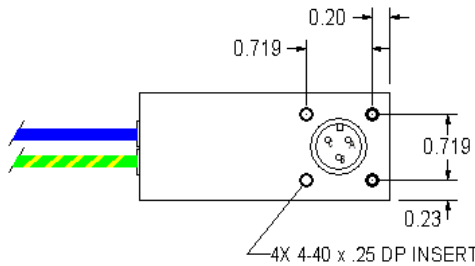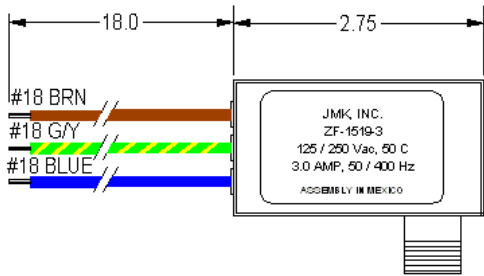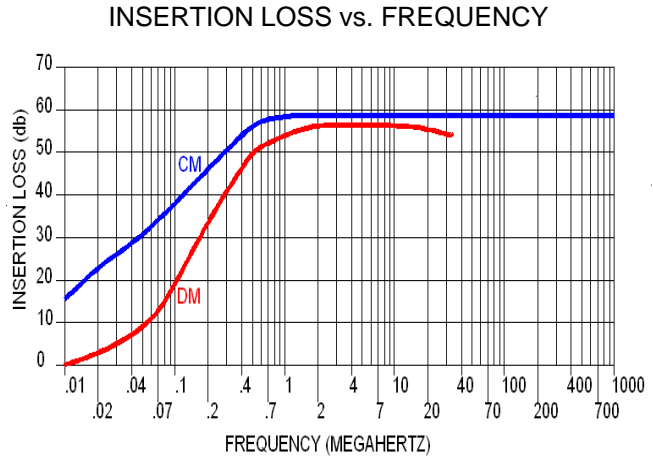

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884