




0233H SERIES

The H version of the 0233 series filter offers good common and differential mode insertion loss in an extremely small package.

This filter is well suited in applications where space is very limited.
 MTBF=482,486 hours GB

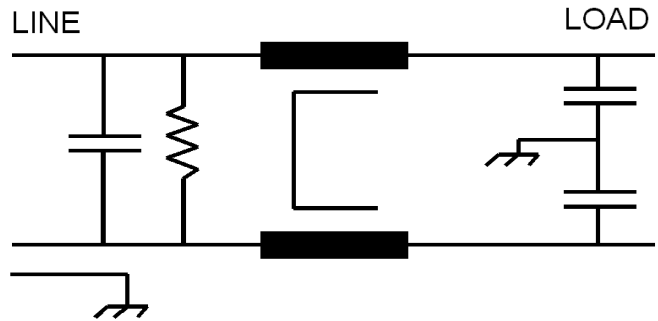

Operating Voltage = 115/250VAC
 Operating Current = 1,3, & 6 amperes
 Operating Frequency = 50/60 Hz
 Operating Temperature = -20 to 50 deg. C
 Dielectric Withstanding (Line-Ground) = 1500 VDC for 1 minute
 Dielectric Withstanding (Line to Line) = 1500 VDC for 1 minutes
 Leakage Current = 0.5 mA @ 250 VAC, 50Hz
 Residual Voltage (Max after 5 sec.) = 34 Volts
 Agency Approvals
 UL, CSA, VDE

