




0664Y SERIES

The 664Y filter is a 3 phase (WYE) filter.
 This series is designed to be used with military systems which are required to meet the conducted emission levels of MIL-STD-461, CE03.
 Minor modifications can be done to adjust the Environmental and vibration specs.

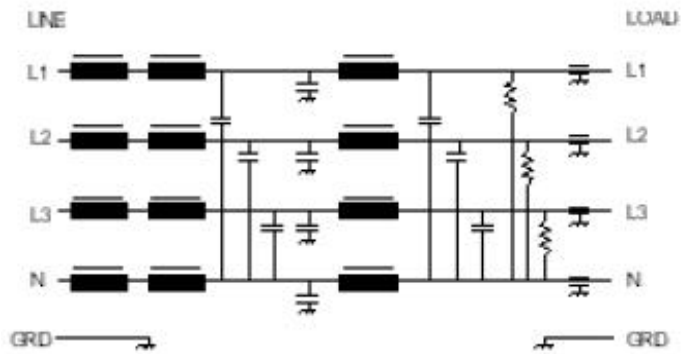

Operating Voltage = 250/480 V ac
 Operating Current Max= 7 & 10 amps
 Operating Frequency = 50 - 400Hz
 Operating Temperature= -20 to +50oC
 Dielectric Withstand (L to Case)= 1 500V ~for 1 Min.
 Dielectric Withstand (L to L)= 1 500V dc for 1 Min.
 Leakage current @ 250V ~60Hz=
 7.0 mA at 250V ac, 400Hz
 Max Residual Voltage after 5 secs = 34 Volts
 Max

