




EF-0464-5

The 464 filter series is designed to be used with systems requiring conducted emission control from 10Khz to 1.0Ghz.

The filter features a standard IEC connector for easy adaptability to power systems anywhere in the world.

This filter would be useful in TEMPEST or other high security environments where reliable, wide band emission control is necessary.

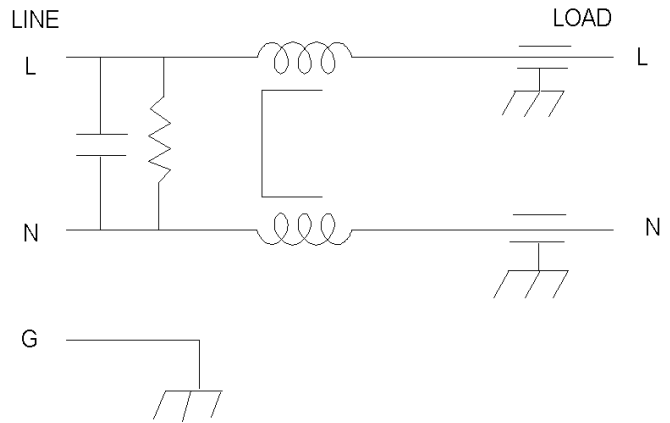

Operating Voltage (AC) = _____ 115/250 VAC
 Operating Current = _____ 5 Amps
 Operating Frequency = _____ 50/60Hz
 Operating Temperature = _____ -10°C—60°C

Diel. Withstanding (line—case) = _____ 1500 VAC
 Diel. Withstanding (line—line) = _____ 1500 VDC

Leakage Current = _____ 4.5 mA @ 115 V, 60 Hz

Max Residual Voltage after 60 sec = _____ 30 Volts

