
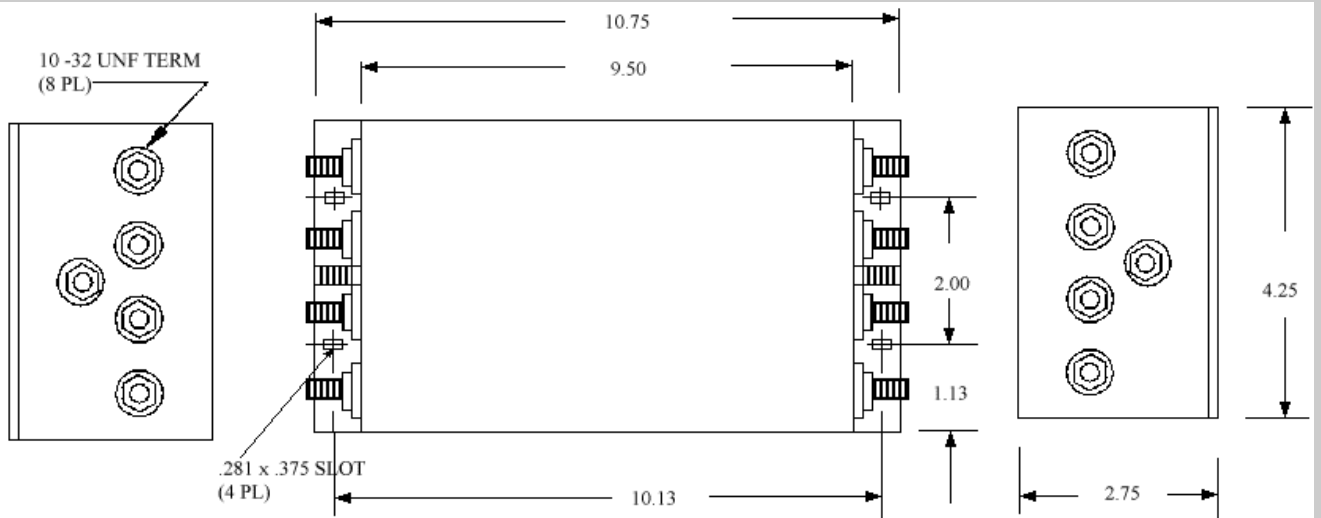
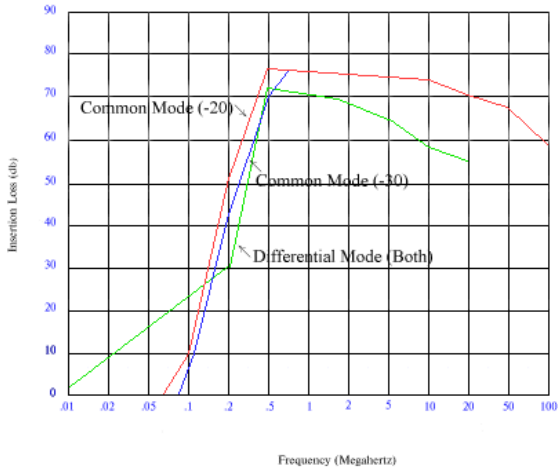
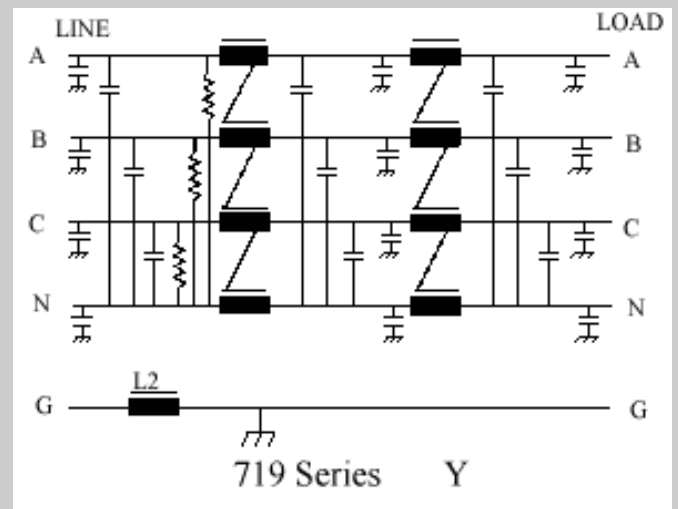


JMK Inc.

717/719 SERIES

The 717 & 719 series filters provide superior wideband filtering for Wye or Delta power configurations. This series employs both differential mode and common mode insertion loss.

Operating Voltage= 250/480 Vac
 Operating Current Max= 20,30 amp
 Operating Frequency= 50-60Hz
 Temperature Range= -20 to 50 deg. C
 Die Withstand (Line to Case)= 1500V~ for 1 Min
 Die Withstand (Line to Line)= 1500Vdc for 1 min
 Leakage Current = 2.0 mA @ 250 VAC,560Hz
 Discharge after 5.0 sec.= 34V Max
 Agency Approvals = UL

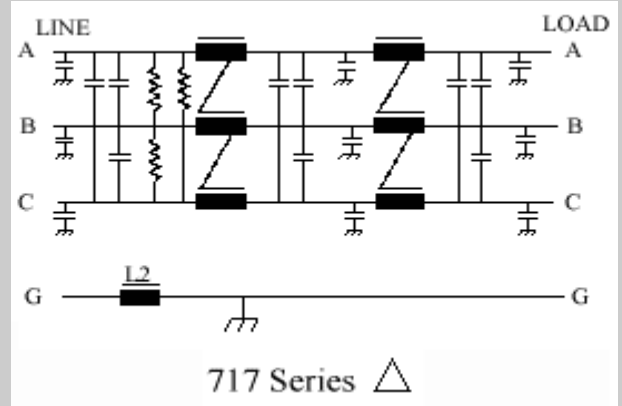

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141 589 1884