




# 0916 SERIES

This series of filters has been designed to meet tempst and other requirements where high insertion loss is necessary. This series is designed with feedthru Capacitors to provide attenuation to RF noise at frequencies from below 10 KHz to above 1 GHz

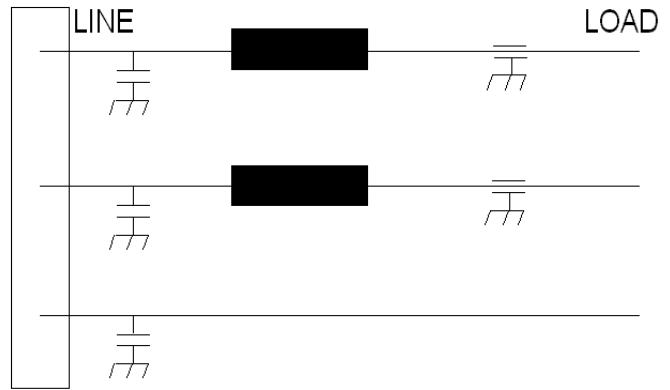

**Operating Voltage = 125VAC**  
**Operating Current = 1,3,5 & 10 amperes**  
**MTBF = 1,344,850 hours GB**  
**Operating Frequency = 50—400 Hz**  
**Operating Temperature = -20 to 50 deg. C**  
**Dielectric Withstanding (Line-Ground) = 800 VDC for 1 minute**  
**Dielectric Withstanding (Line to Line) = 800 VDC for 1 minutes**  
**Leakage Current = 56 mA @ 125 VAC, 60Hz**  
**Residual Voltage (Max after 5 sec.) = 35 Volts**

