




0916 SERIES

This series of filters has been designed to meet tempst and other requirements where high insertion loss is necessary. This series is designed with feedthru Capacitors to provide attenuation to RF noise at frequencies from below 10 KHz to above 1 GHz

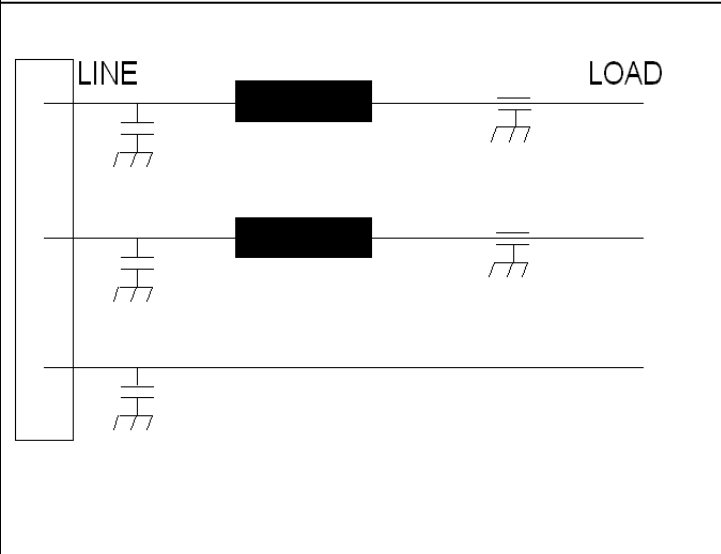

**Operating Voltage = 125VAC
 Operating Current = 1,3,5 & 10 amperes
 MTBF = 1,344,850 hours GB
 Operating Frequency = 50—400 Hz
 Operating Temperature = -20 to 50 deg. C
 Dielectric Withstanding (Line-Ground) = 800 VDC for 1 minute
 Dielectric Withstanding (Line to Line) = 800 VDC for 1 minutes
 Leakage Current = 56 mA @ 125 VAC, 60Hz
 Residual Voltage (Max after 5 sec.) = 35 Volts**

