




# EA-1355-3HT

The EA-1355-3HT filter has been designed to operate with the VICOR Harmonic Attenuator Module (HAM).

This filter was specifically designed to meet Mil-Std-461C, D, E or F and is configured for those applications where an IEC connector input is preferred and a lower current will be drawn.

Order P/N:      EA-1355-3HT (High Temp)

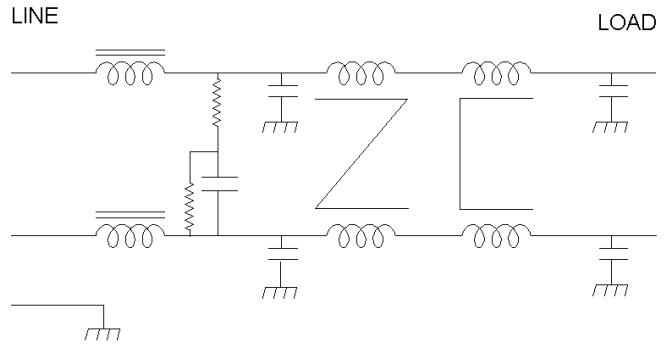

Operating Voltage = \_\_\_\_\_ 85 to 250 V  
 Operating Current = \_\_\_\_\_ 3 Amp  
 Operating Frequency = \_\_\_\_\_ 50/400 Hz  
 Operating Temperature, High = \_\_\_\_\_ 60°C  
 Operating Temperature, Low = \_\_\_\_\_ -40°C

Diel. Withstanding (line - case) = \_\_\_\_\_ 1500 Vac  
 Diel. Withstanding (line - line) = \_\_\_\_\_ 1500 Vdc

Leakage Current = \_\_\_\_\_ 2.5 ma @ 220 V, 60 Hz  
 Max residual voltage after 1 sec = \_\_\_\_\_ 34 Volts

Calculated MTBF = \_\_\_\_\_ 2,142,107 Hrs @ 30°C GB

