


JMK. Inc.




FF-1585-40

Operating Voltage = 250/480 V~, 50 / 60 Hz
 Operating Voltage = 125/208 V~, 50 – 400 Hz
 Operating Current = 40 A / Phase
 Temperature Range = -20 TO 50 Deg. C
 Diel. Withstand (L-CASE) = 1500 V~ FOR 1 MIN.
 Diel. Withstand (L-L) = 1500 Vdc For 1 Min.
 Leakage Current = 3.4 ma @ 250 V~, 60 Hz
 Discharge Volt after 1.0 second = 34 V Max.
 Maximum Capacitance each line to case = 0.016 μ F

Order P/N: FF-1585-40

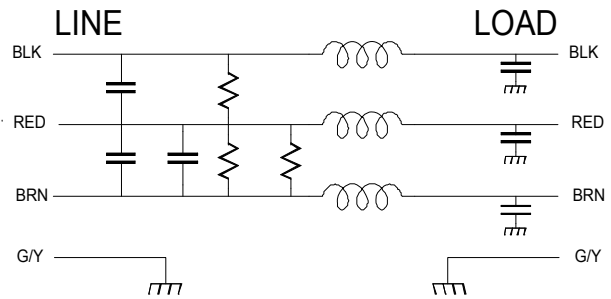

The FF-1585-40 is a delta configuration, 3-phase filter designed for use with large computers, power distribution units, motor installations, etc. The compact size and leads make the filter package easy to install where size is at a premium.

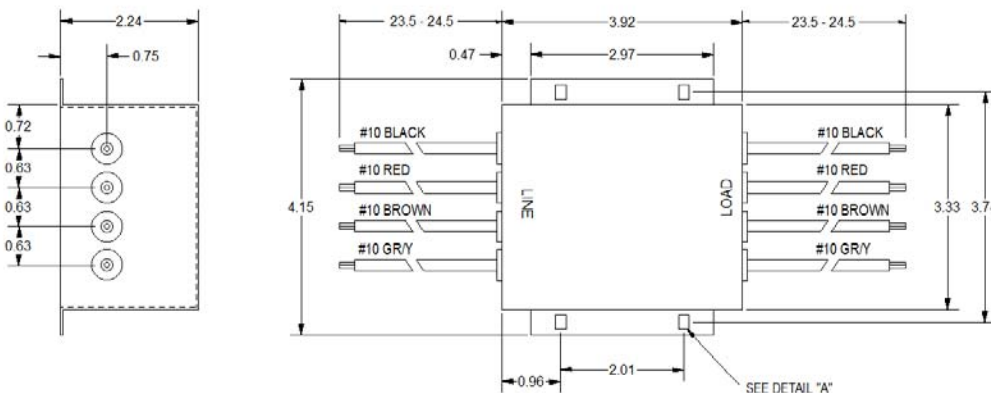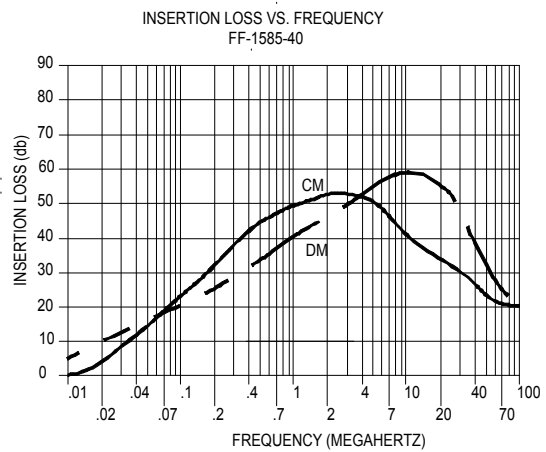

DETAIL "A"

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Ltd Scotland UK PH: 44-778 553-0729 email: johnp@jmkfilters.com