

JMK, Inc.

ZF-0916-3

The ZF-0916-3 filter is designed to be used in systems that are required to work in the temper environment or to meet the requirements of Mil-Std-461D, E, or F. Feed through capacitors and the sealed construction provide excellent insertion loss from less than 10 KHz to beyond 1.0 Ghz.

The filter has been designed to meet the following:
 Humidity: Mil-Std-810, Method 504.3, Procedure I.
 95 % humidity, non-condensating.


Shock: Mil-Std-810, Method 516.4, Procedures IV & VI

Vibration: Mil-Std-810, Method 514.4, Category 8

Weight: 0.6 lb

MTBF: TBD

RohS compliant

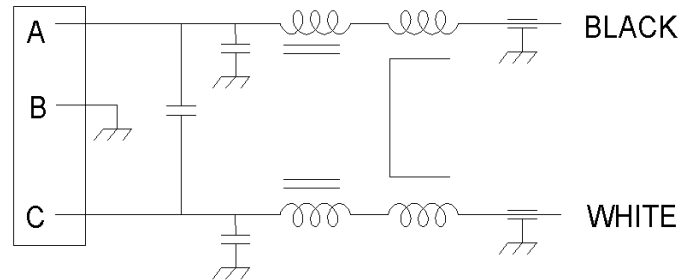

Performance Characteristics

Operating voltage: 125/250 Vac, 50/60 Hz
 125 Vac, 400 Hz

Max. operating current: 3.0 ampere

Operating temperature: -40—60°C

Dielectric Withstand. Line/case: 1500 Vac. (1.0 minute)



Dielectric Withstand. Line/Neut: 1500 Vdc. (1.0 minute)

Capacitance, (Each line—case): 0.02 μ F Typ.

Leakage current 125V, 60 Hz: 1.15 ma max

125V, 400 Hz: 7.55 ma max

250 V, 50 Hz: 1.90 ma max

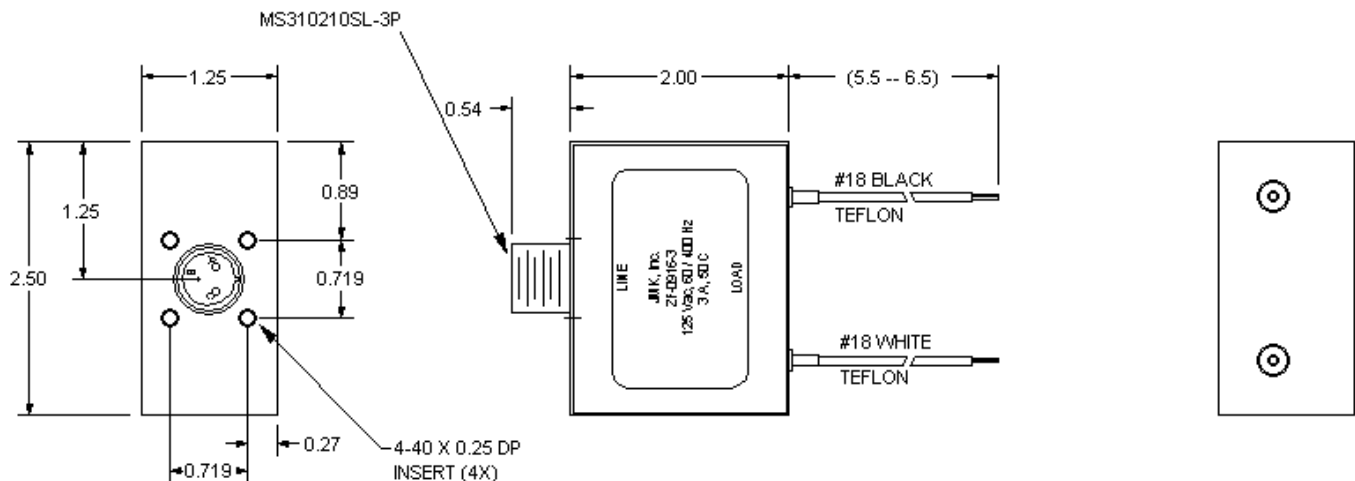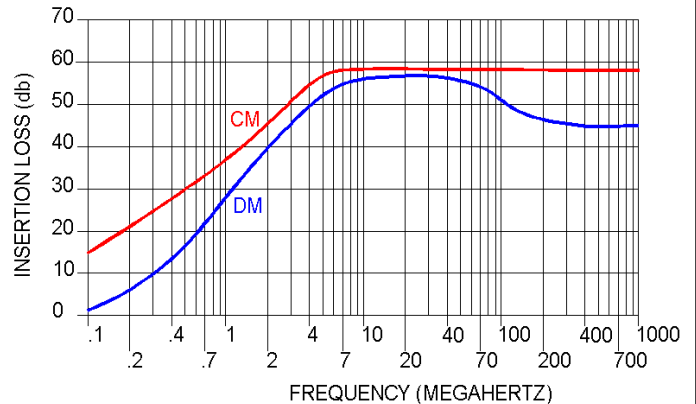

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115

email: info@jmkfilters.com

EUR JMK Inc Glasgow, Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141 589-1884