








# ZG-1633-18

The ZG-1633-18 is a P.A. Amplifier Intended for mobile applications. (12 VDC)

- 1) Dual amplifiers in one enclosure. One for interior, one for exterior.
- 2) Operator selects interior, exterior or both for annunciation.
- 3) There is a line level input to each amplifier for ongoing program material
- 4) 18 watts peak power output into 4 ohms per channel with less than 10% T.H.D.
- 5) Line level and mic. gain adjustment controls.
- 6) AGC ready amplifier provides a means to use the vehicles P.A. speakers as a way to measure ambient noise for setting program output level.
- 7) time out circuit to the microphone input that automatically un-keys the microphone after 30 seconds.

Operating Voltage = \_\_\_\_\_ 12 Vdc  
 Operating Current = \_\_\_\_\_ 18 Amps  
 Operating Temperature Range = \_\_\_\_\_ -40 to 50°C

Order P/N: ZG-1633-18

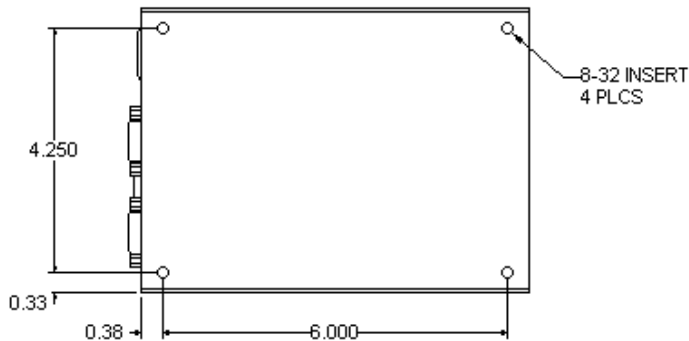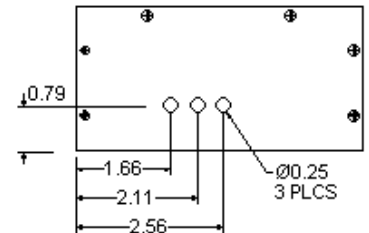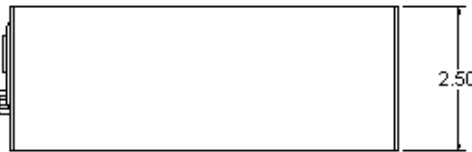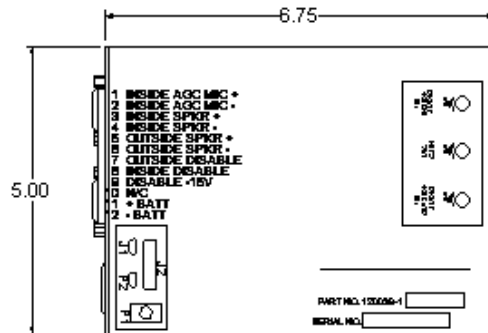

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884