



# FF-1513-3B

Operating Voltage= \_\_\_\_\_ 125 - 250 Vac  
 Operating Current= \_\_\_\_\_ 3 Amps  
 Operating Frequency= \_\_\_\_\_ 50 - 60 Hz  
 Operating Temperature= \_\_\_\_\_ 50°C




Diel. Withstanding (line-case)= \_\_\_\_\_ 1500V; 1 Min  
 Diel. Withstanding (line- line)= \_\_\_\_\_ 1500Vdc; 1 Min

Leakage Current= \_\_\_\_\_ 100 µAmp Max. @ 250 V / 50Hz  
 Max Residual Voltage after 1 sec= \_\_\_\_\_ 32 V Max

Agency approvals= UL

Calculated MTBF= \_\_\_\_\_ 1,306,174 Hrs @ 30°C GB

Order P/N: FF-1513-3B

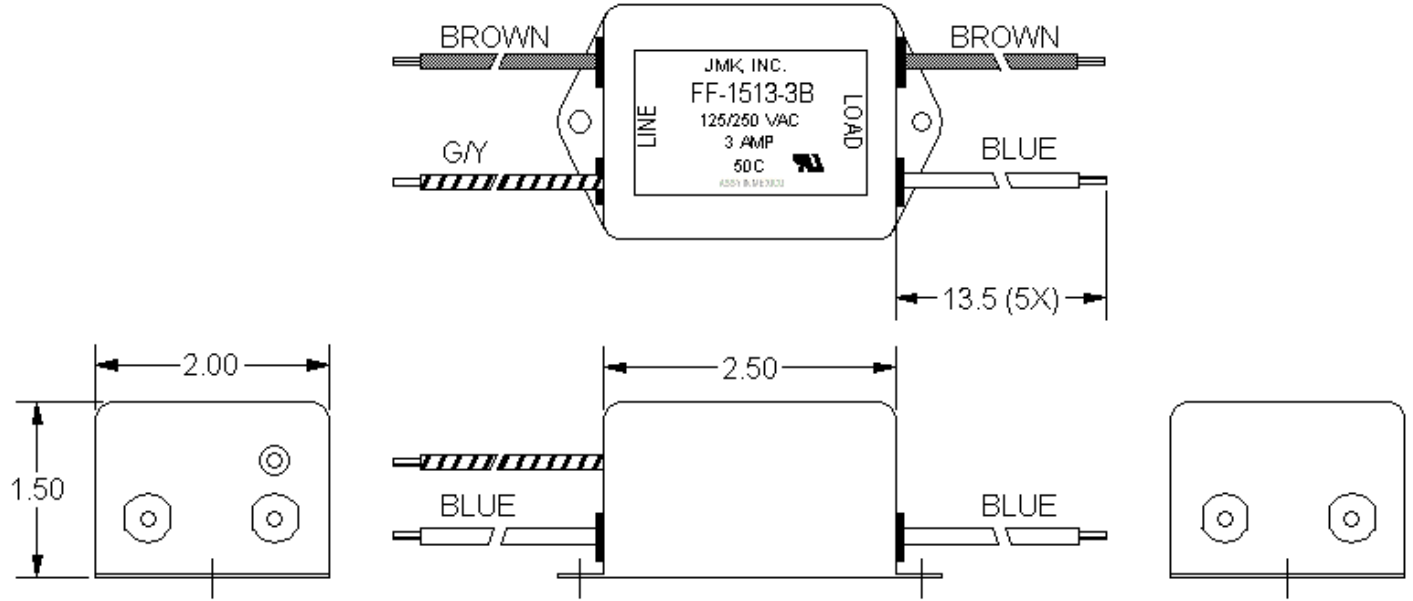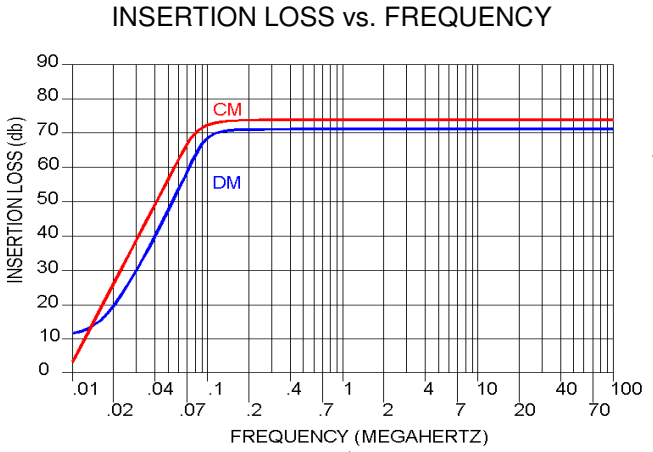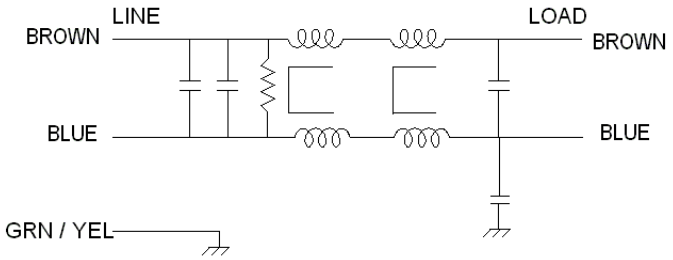

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884