

## **0828 SERIES**

The 0828 filters are excellent for suppressing noise from switching power supplies and other devices where a considerable amount of common mode and differential mode elect rical noise is present.

This series is available with both 6.3mm terminals or with the IEC inlet connector

LINE LOAD BLUE


BROWN
GRAYL


Operating Voltage = 115/250VAC Operating Current = 1.5 amperes MTBF= 320,254 hours GB

Operating Frequency = 50/60 Hz
Operating Temperature = -10 to 50 deg. C
Dielectric Withstanding (Line-Ground) =
1500 VDC for 1 minute

Dielectric Withstanding (Line to Line) = 1500 VDC for 1 minutes

1500 VDC for 1 minutes Leakage Current = 0.5 mA @ 250 VAC, 50Hz Residual Voltage (Max after 5 sec.) = 25 Volts Agency Approvals UL, CSA, VDE

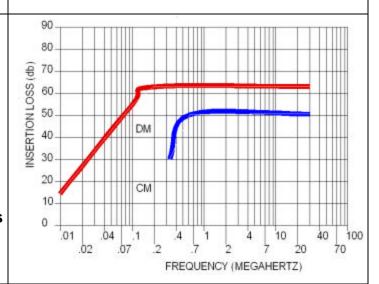

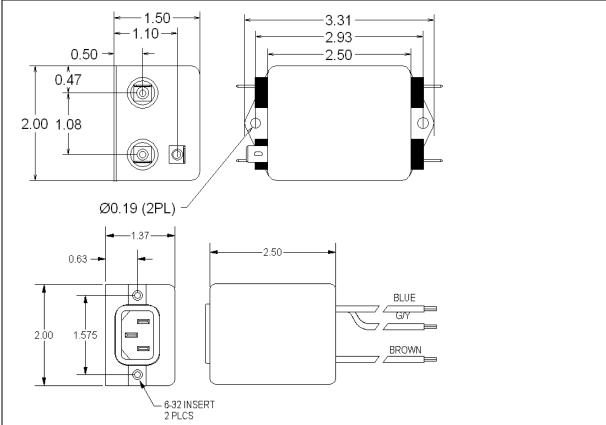

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884