




AA-1355-6.3HT

The AA-1355-6.3HT filter has been designed to operate with the VICOR Harmonic Attenuator Module (HAM).

This filter was specifically designed to allow the Vicor HAM and associated power converters to meet Mil-Std-461D, E or F

This version of the filter is configured for those applications where a chassis mount for the filter is preferred.

Order P/N: AA-1355-6.3HT

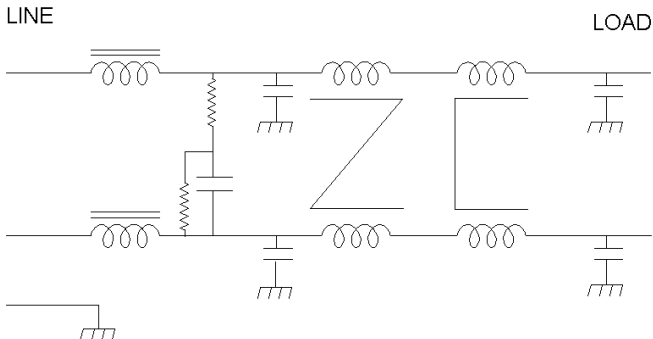

Operating Voltage = _____ 85 to 250 V
Operating Current = _____ 6.3 Amp
Operating Frequency = _____ 50/400 Hz
Operating Temperature, High = _____ 60° C
Operating Temperature, Low = _____ -40° C

Diel. withstanding (line - case) _____ 1500 Vac
Diel. withstanding (line - line) _____ 1500 Vdc

Leakage Current = _____ 2.5 ma @ 220 V, 60 Hz
Max residual voltage after 1 sec = _____ 34 Volts

Calculated MTBF = _____ 2,142,107 Hrs @ 30° C GB

