FF-2053-15

The FF-2053-15 filter has been designed to operate with the WESTCOR Mega Pac and to meet the conducted emission requirements of Mil-Std-461D, E or F.

The standard filter has a chassis mount enclosure but the filter enclosure can be modified to add a connector input or other terminals to suit your requirements.

The leads are Teflon but can be changed if the Teflon is an issue.

The filter is lead free and RoHS.

Order P/N: FF-2053-15 (STD)
FF-2053-15HT (High Temp)

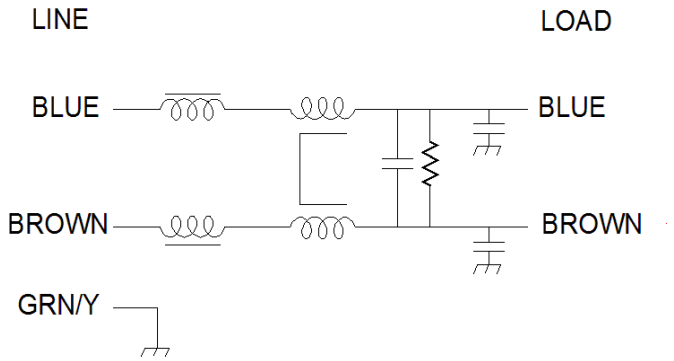

Operating Voltage = _____ 85 to 250 V
Operating Current = _____ 15 Amp
Operating Frequency = _____50/400 Hz
Operating Temperature, High = _____ 60°C
Operating Temperature, Low = _____-20ºC, STD
= _____ -40ºC, HT
Storage Temperature = _____ -40ºC—100ºC

Diel. Withstanding (line - case) = _____1500 Vac
Diel. Withstanding (line - line) = _____1500 Vdc
Leakage Current = _____2.5 ma @ 220V, 60Hz
Max Residual Voltage after 1 sec =_____ 34 Volts

Calculated MTBF = _____ 16,625,107 Hrs @30°C GB

INSERTION LOSS vs. FREQUENCY

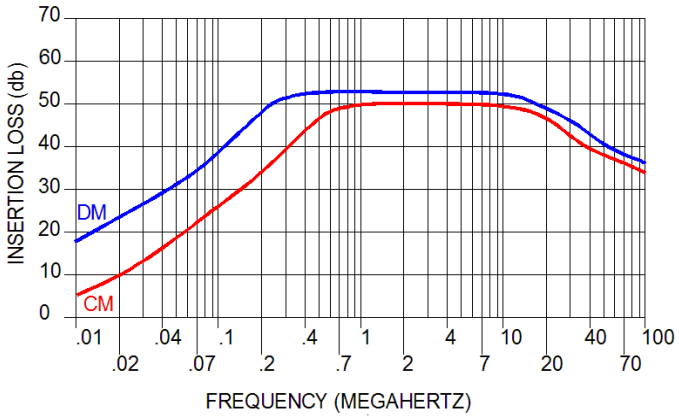

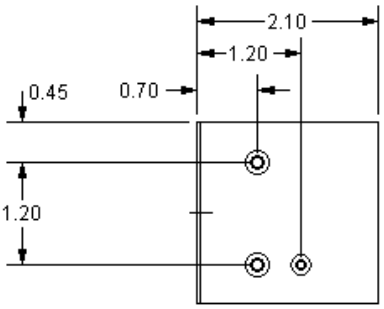

FF-2053-15

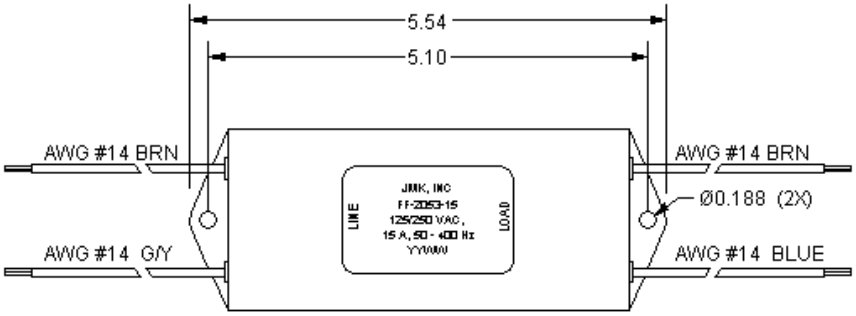



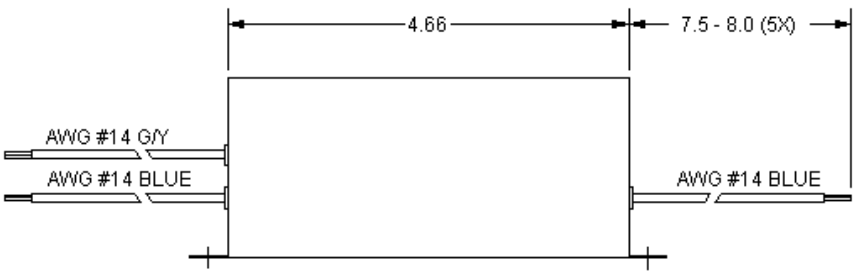

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
email: info@jmkfilters.com
EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884