




ZG-1435-1B

The ZG-1435-1B filter has been designed for systems operating under the requirements of MIL-STD-461D, E or F.

The filter's case is environmentally sealed and is designed to handle the shock and vibration of wheeled vehicle installations.

The circuit uses "Feed-Through Capacitors" with an insertion loss is 60 db to 1.0 Ghz and beyond.

Order P/N:
 ZG-1435-1B (MIL-STD-461C)
 ZG-1435-1BD (MIL-STD-461D or E)


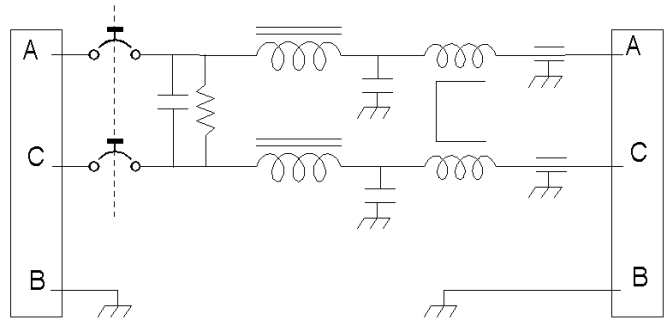


Operating Voltage = _____ 125 Vac
 Operating Current = _____ 1.0 Ampere
 Operating Frequency = _____ 60—400 Hz

Temperature Range (Storage) = _____ -40 to 105°C
 Temperature Range (Operating) = _____ -40 to 65°C

Leakage current (Max) @ 125 V~, 60 Hz = ____ 0.85 mA
 Diel. Withstand (L-Grd) (1 Min) = _____ 1500 Vac
 Diel. Withstand (L-L) (1 Min) = _____ 1500 Vdc

Calculated MTBF = _____ 1,382,271 Hrs

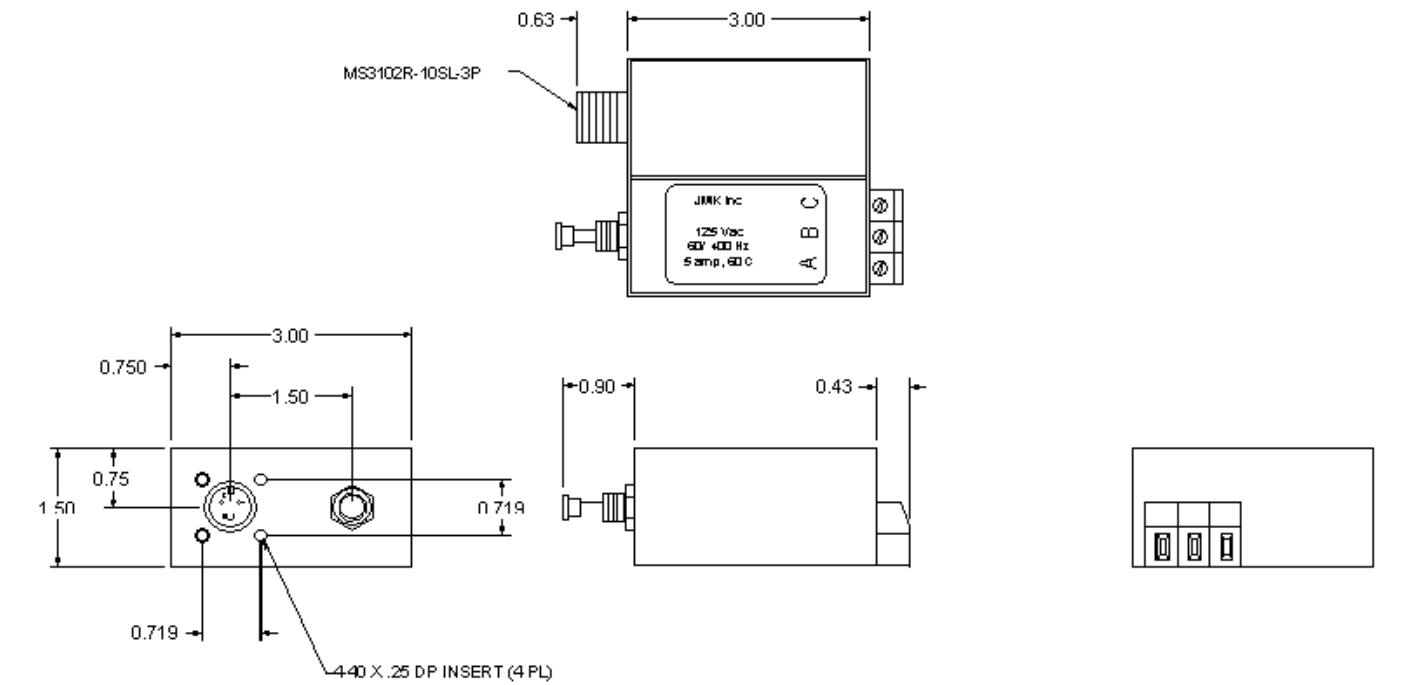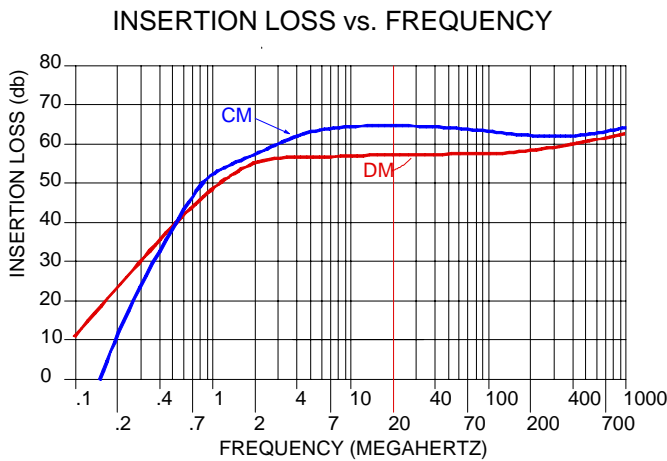

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884