





EF-1233M-12

This filter provides very good common mode and differential insertion loss for 12 amp single phase systems. This filter works well for medical systems with requirements to meet the new European EN55022 emissions specification.

The standard construction is more than adequate for most installation environments. Should your application require operation in a more severe environment JMK's engineering staff can easily modify the mechanical construction to meet the most severe design criteria.

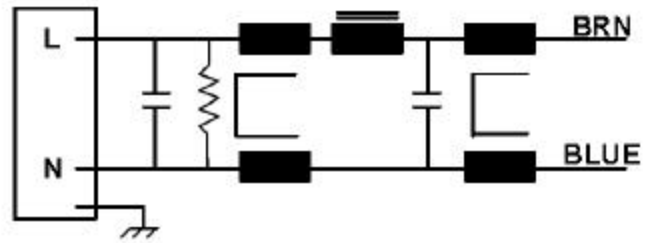

Operating voltage = 90/240 v~
 Operating current (max) = 12 amperes
 Frequency = 50/60 hz
 Temperature range (storage) = -40 to 100 c
 Temperature range (operating),
 @12 amps = -20 to 40oC
 @10 amps = -20 to 60oC
 Diel. withstanding voltage (ph - case) =1500v~
 Diel. withstanding voltage (ph - ph) = 1500 vdc
 Leakage current @ 250 v~, 60 hz = 30 ua max
 Discharge voltage after 1.0 sec = 32 V max
 Safety Agencies = CSA (NRTL)

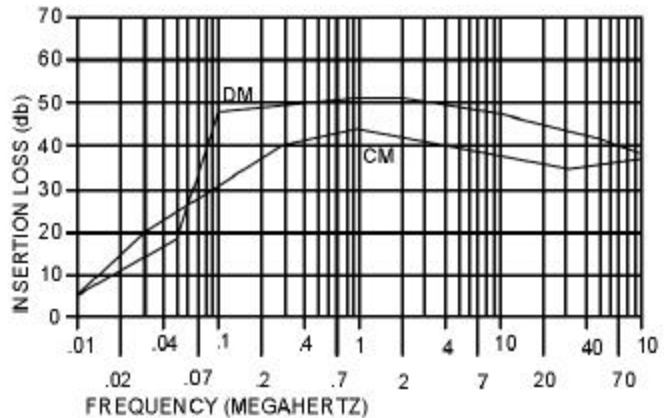

Order p/n: EF-1233M-12

