




# 283 SERIES

Operating voltage = 115/250 Vac  
 Operating current = 20, 30 Amp  
 Operating frequency = 50/60Hz  
 Operating temperature = -20° to 50° C  
 Diel. withstanding (line - case) = 1500 Vac  
 Diel. withstanding (line - line) = 1500 Vdc  
 Leakage current = 1.5 ma at 250 Vac, 60 Hz  
 Max residual voltage after 1 sec. = 30 Volts  
 Agency approvals = UL -- E60380  
                           CSA -- LR50822-3, -135, -136  
                           VDE -- 12819-4730-1014 A1G

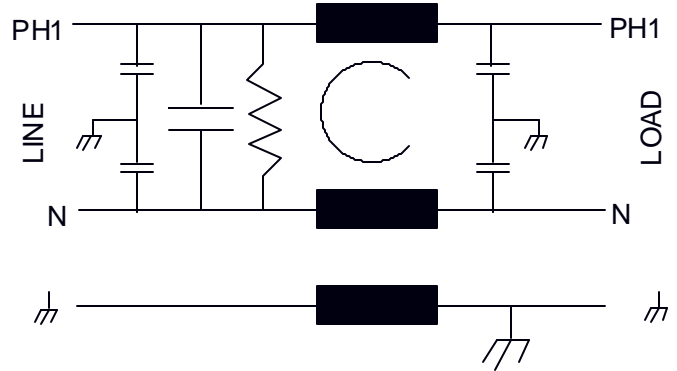

The 283 filter is a compact, single phase, high current device with very good common mode and differential mode insertion loss. It is very useful in power control systems where the ground coil will help eliminate system ground loop noise.

Ordering Information

20 AMPS	KK-0283-20 KK-0283-20M (METRIC)
30 AMPS	KK-0283-30 KK-0283-30M (METRIC)

