





# EF-0772-6B

Operating Voltage = \_\_\_\_\_ 115/250 V  
 Operating Current = \_\_\_\_\_ 3,6 Amps  
 Operating Frequency = \_\_\_\_\_ 50 / 60 Hz  
 Temperature Range = \_\_\_\_\_ -20 to 50°C

Diel. Withstand (L-CASE) = \_\_\_\_\_ 1500 V; 1 Min  
 Diel. Withstand (L-L) = \_\_\_\_\_ 1500 Vdc; 1 Min  
 Leakage Current = \_\_\_\_\_ 0.5 mA @ 250 V, 60 Hz  
 Discharge Volt after 1.0 sec = \_\_\_\_\_ 34 V Max

Agency Approvals = CSA, UL



Order P/N: EF-0772-6B (6 amp)

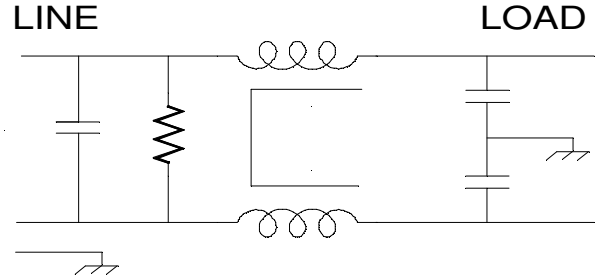

MOUNTING HOLE DIMS.

PANEL THK	X	Y
.04 - .07	1.18	.815
.07 - .125	1.18	.825

INSERTION LOSS vs. FREQUENCY

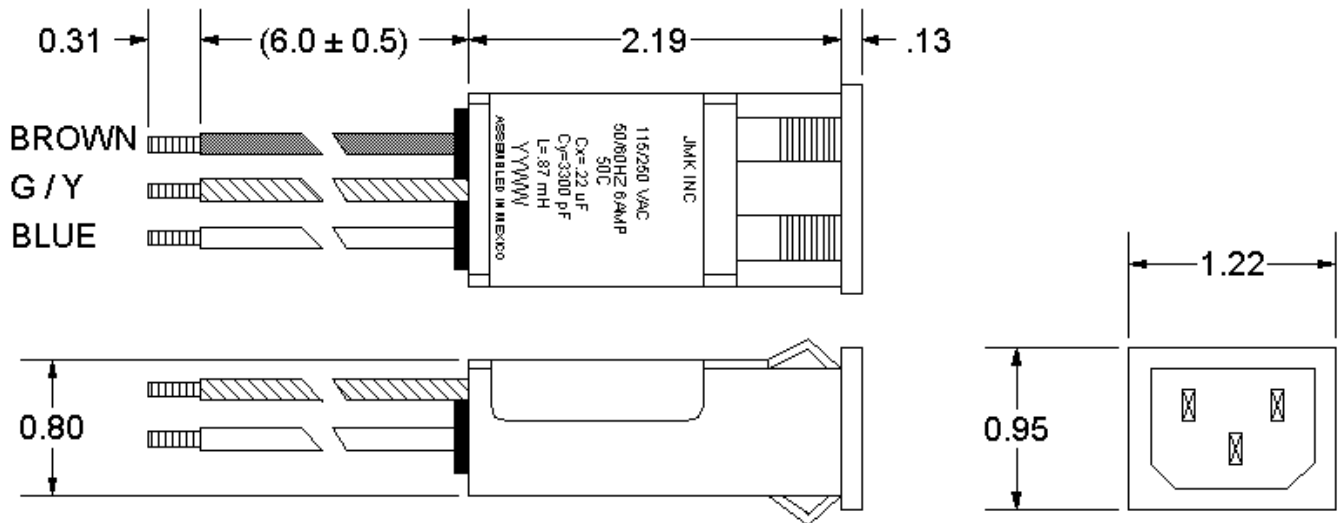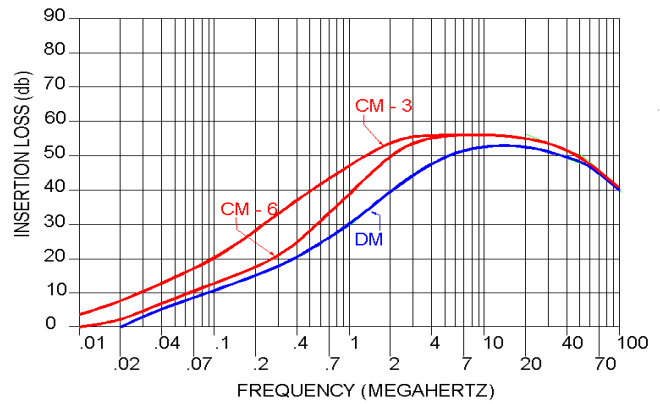

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884