





FF-1405-6B

Operating Voltage = _____ 277 V~
 Operating Current = _____ 6 Amps
 Operating Frequency = _____ 50 / 60 Hz
 Temperature Range = _____ -20° TO 50 °C


Diel. Withstand (L-CASE) = _____ 2000 V~; 1 Min
 Diel. Withstand (L-L) = _____ 2000 Vdc; 1 Min

Leakage Current = _____ 1.0 mA @ 250 V~, 60 Hz
 Discharge Volt after 1.0 second = _____ 10 V Max



MTBF= 1,151,320hours at 30oC GB
 Order P/N: FF-1405-6B

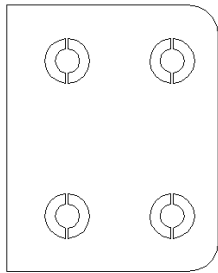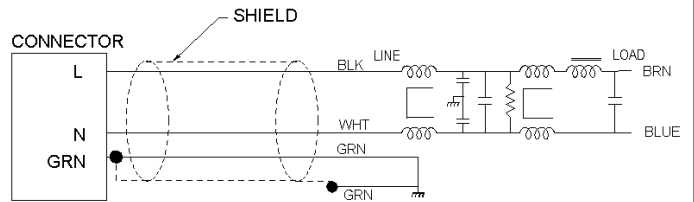

VIEW
A - A



VIEW
B - B

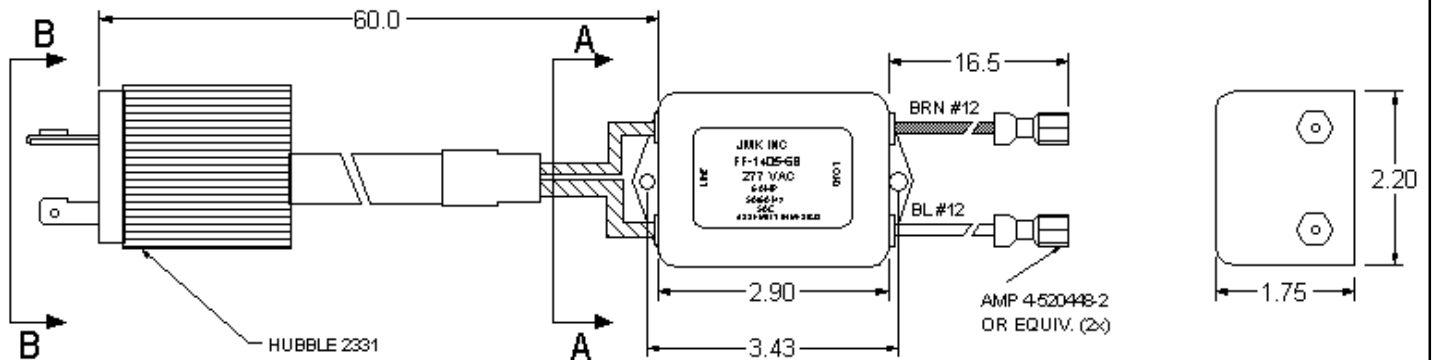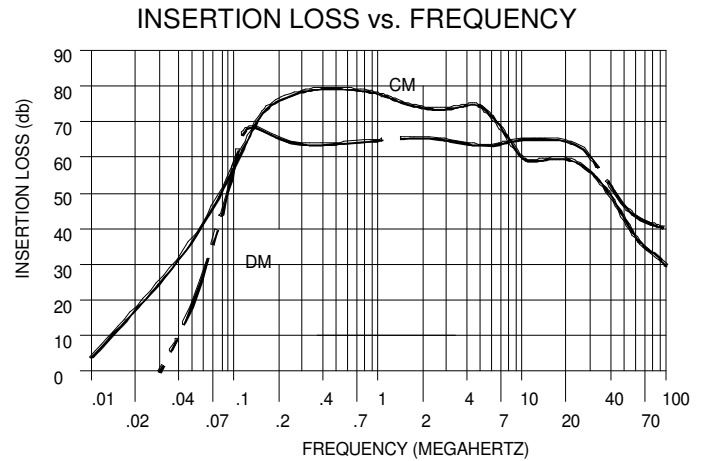

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884