



FF-1446C-5





Max. Operating Voltage: _____ 130 Vac @ 400Hz
 : _____ 250 Vac @ 50—60 Hz
 Max. Operating Current: _____ 5.0 Amp
 Operating Frequency: _____ 50—400 Hz

Temperature Range: _____ -20°C—50°C

Diel. Withstand (L-CASE): _____ 1500V, 60Hz; 1.0 Min
 Diel. Withstand (L-L): _____ 1500 Vdc; 1 Min

Leakage Current: _____ 0.5 mA @ 250 V~, 60 Hz
 Discharge Volt after 1.0 second: _____ 34 V Max
 MTBF = 2,721,092 hours at 30oC GB

Order P/N: FF-1446C-5

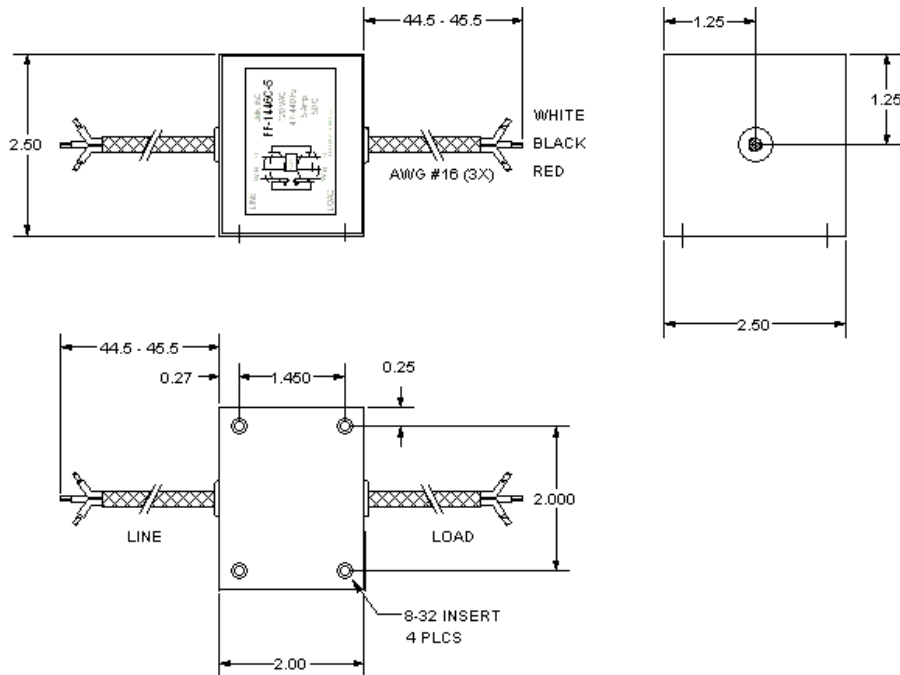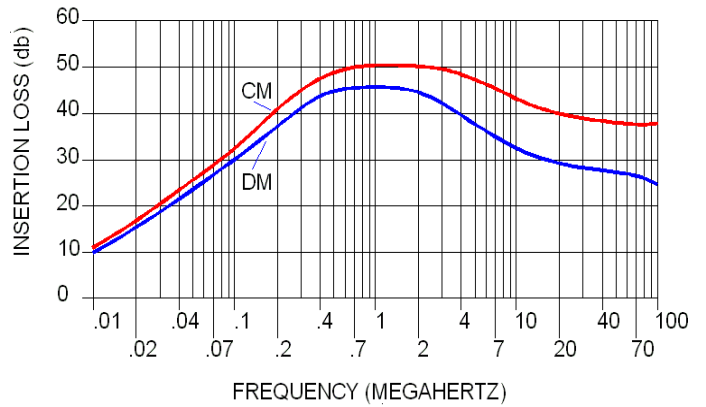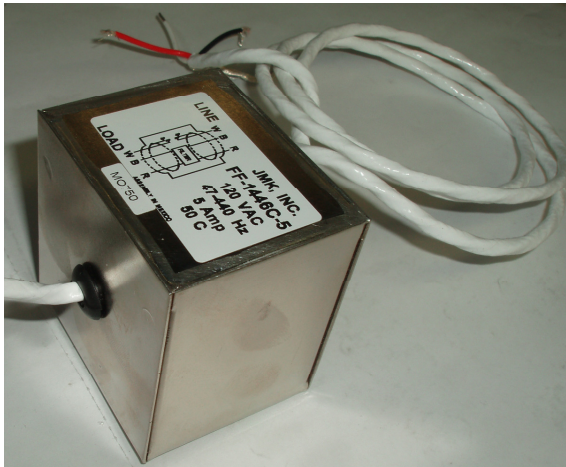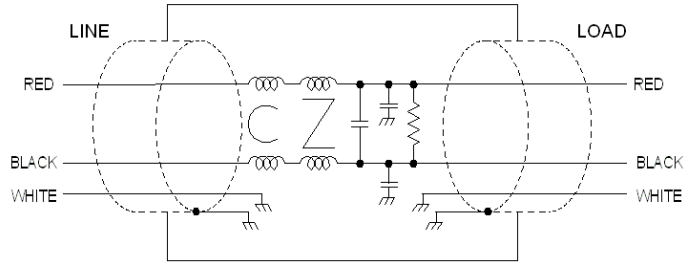

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884