



FF-1505-5

Operating Voltage: _____ 125 /250 Vac
 Operating Current: _____ 5 Amps
 Operating Frequency: _____ 50—60 Hz
 Operating Temperature: _____ -40°C to 50°C






Diel. Withstanding (line-case): _____ 1500V; 1 min
 Diel. Withstanding (line– line): _____ 1500Vdc; 1 min

Leakage Current: _____ 0.35 mA @ 250 V / 60 Hz
 Max Residual Voltage after 1 sec: _____ 34 V

Calculated MTBF: _____ 4,854,416 Hrs @ 30°C GB

Lead Free

Order P/N: FF-1505-5

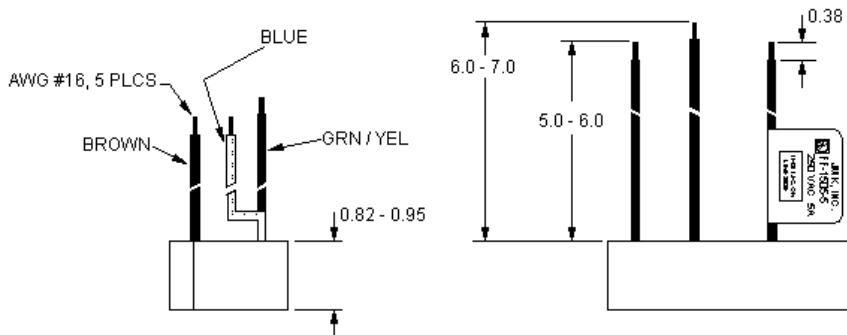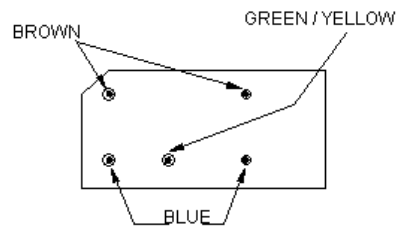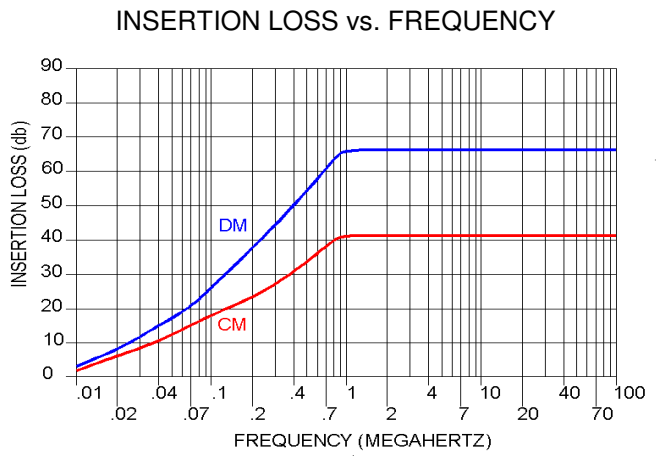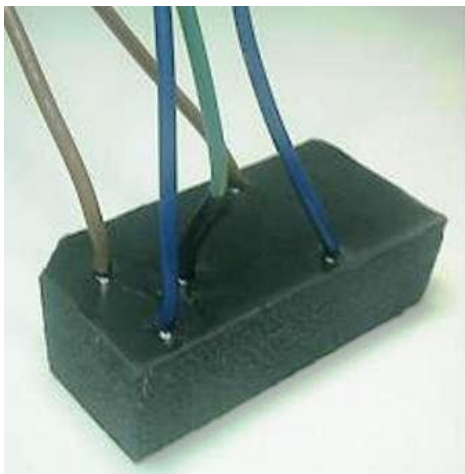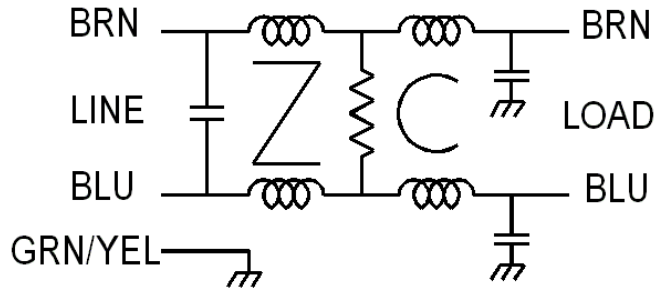

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884