




# KK-1364-60

This EMI / RFI filter is intended to provide noise reduction for telecommunications DC power. The components used in the production are capable of passing the UL 707 Volt dielectric withstanding test for telecom equipment. The filter is non-polarized. If modifications are needed to suppress transients, or if more severe temperature operating parameters are required, call or e-mail our Engineering Dept.

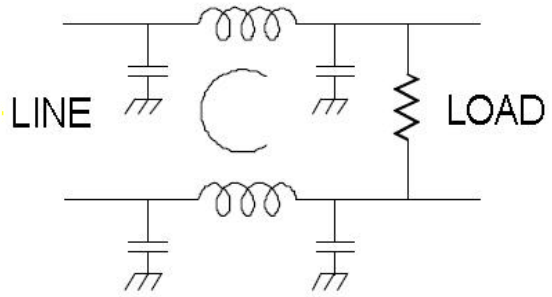

Operating voltage = 0—72 VDC  
 Operating CurRange rent = 50  
 Temperature (operate) = -40 TO 50 C  
 Dielectric withstanding = 707 VDC line-to-case  
 Temperature range (storage) = -40 to 100 C

