



HH-1590-12


This filter is a compact DC power filter designed to operate in telecommunications equipment.

The filter is non-polarized and can operate over a wide temperature range.

The filter is configured to function in the Mil-Std-461E or the EN55022 environment.



This circuit board mount filter uses very little space yet provides a lot of attenuation to meet today's emissions requirements.

Order P/N: HH-1590-12

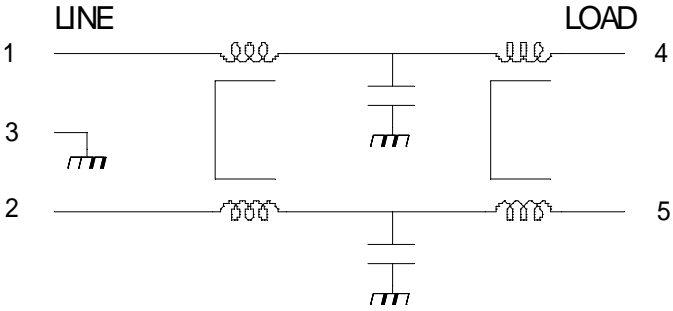

Operating Voltage = _____ 100 Vdc
 Operating Current = _____ 12.0 Amp
 Operating Temperature = _____ (-40)—70°C

Diel. Withstanding (line - case) = _____ 1500 Vdc (1.0 Min)
 Diel. Withstanding (line - line) = _____ 200 Vdc (1.0 Min)

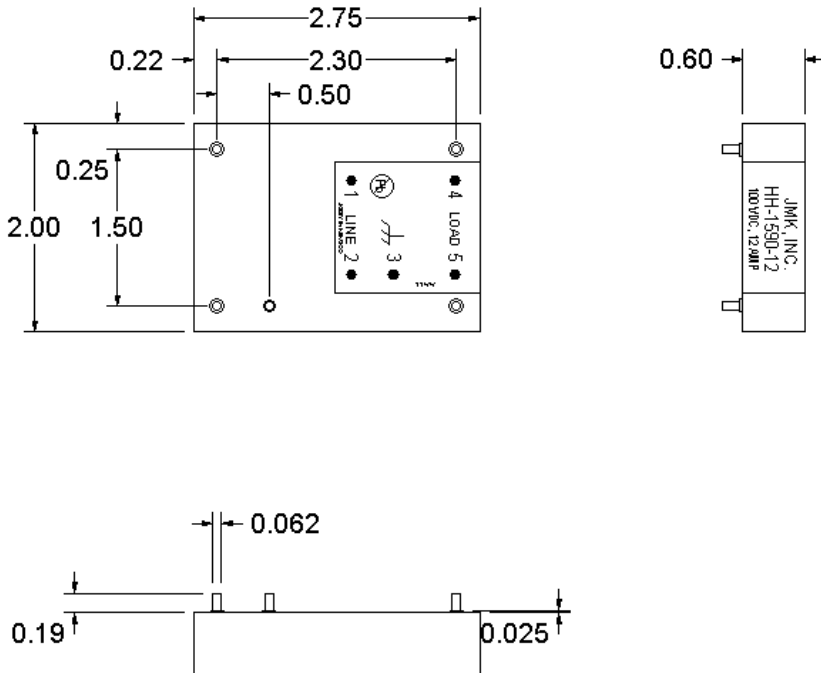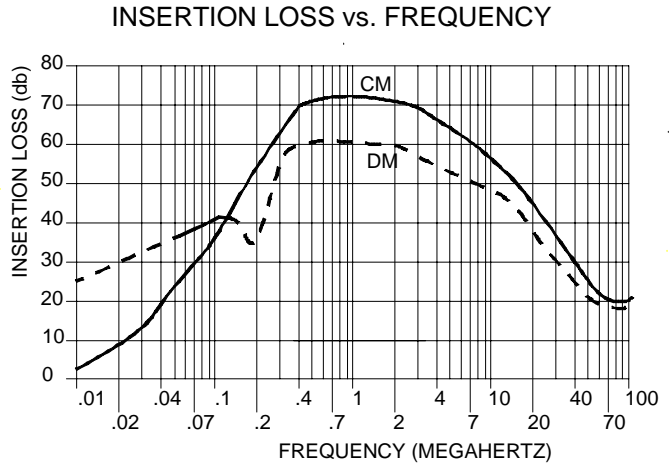

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115
 email: info@jmkfilters.com
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884