



# ZA-2074-8


The ZA-2074-8 filter has been designed for systems operating under the requirements of MIL-STD-461C, D, E, F, and G and/or tempest applications.

The filter's case is environmentally sealed and is designed to handle the shock and vibration of wheeled vehicle installations.

The circuit uses "Feed-Through Capacitors" with an insertion loss of 60 db to 1.0 Ghz and beyond.

The circuit also uses a GAS Discharge tube and MOV to reduce line transients and surges.

Order P/N: ZA-2074-8

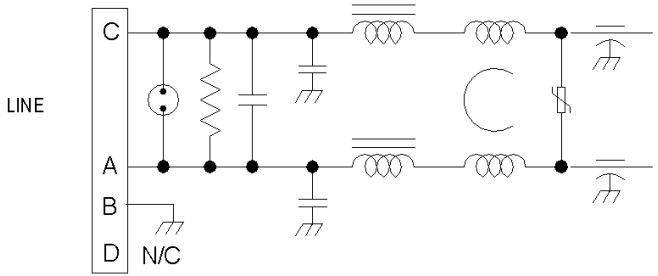

Operating Voltage = \_\_\_\_\_ 92 / 138 VAC  
 Operating Current = \_\_\_\_\_ 8.0 Amps  
 Temperature Range (Storage) = \_\_\_\_\_ -40 to 125°C  
 Temperature Range (Operating) = \_\_\_\_\_ -30 to 60°C  
 Diel. Withstand (L-Grd) = \_\_\_\_\_ 1500 VDC  
 Diel. Withstand (L-L) = \_\_\_\_\_ 389 VDC  
 Calculated MTBF = \_\_\_\_\_ 3,569,478 Hrs

