


CONNECTOR
D38999/20FG11PB

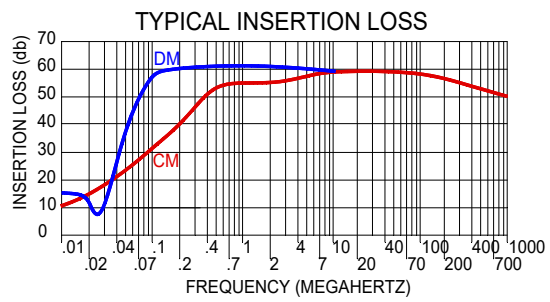

INPUT VOLTAGE: 115 / 250 Vac
 OPERATING FREQUENCY: 50 / 60 Hz
 MAXIMUM CURRENT: 13A / LINE
 MAXIMUM PEAK VOLTAGE LINE - LINE: 600V
 OPERATING TEMPERATURE: -40 TO 100C
 STORAGE TEMPERATURE: -55 TO 100C
 LEAKAGE CURRENT: 1.15 MAX. @ 250V, 60HZ
 DISCHARGE VOLTAGE FROM 360V PEAK
 AFTER 1 SEC: 30 VOLTS MAX
 DIELECTRIC WITHSTANDING (LINE- GRD): 1500 Vac FOR 1 MINUTE
 DIELECTRIC WITHSTANDING (LINE - LINE): 1500 Vdc FOR 1 MINUTE

SCALE	APPROVED BY	DRWN BY RDW
DATE: 2/28/2020		REV DATE 1/4/2021
SPECIFICATION		REVISION A1
TOLERANCE .XX = .02 .XXX = .005	DRAWING NO. ZA-2457-13	