

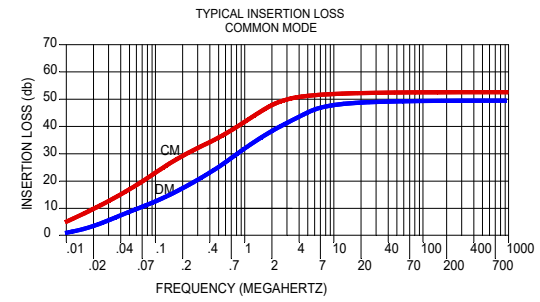



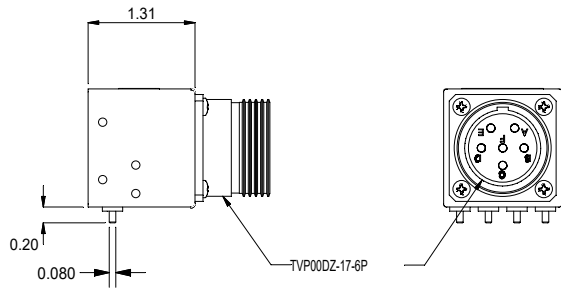



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	RELEASE	10/25/18	
	B	CLARICAL CHANGE	3/23/2018	
	C	ADD ASSEMBLY STEPS ON PAGE 3	10/26/2018	



MAX OPERATING VOLTAGE: 80 VDC  
 MAXIMUM OPERATING CURRENT: 20A / LINE  
 MAX OPERATING TEMPERATURE: -40 TO 80C  
 STORAGE TEMPERATURE: -40 TO 100C



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1 BEND ± TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-1994 MATERIAL: FINISH: USED ON:	NAME	DATE	 TITLE: <b>SPECIFICATIONS</b>	
	DRAWN			SIZE: <b>B</b>
	CHECKED			DWG. NO.: <b>ZH-2359-40B</b>
	ENG APPR.			REV: <b>C</b>
	MFG APPR.		CAGE CODE 66239	
	O.A.		SCALE: 1:1	
	COMMENTS:		SHEET 1 OF 3	