



MAX. WEIGHT : 16.0 - 16.2 LBS.

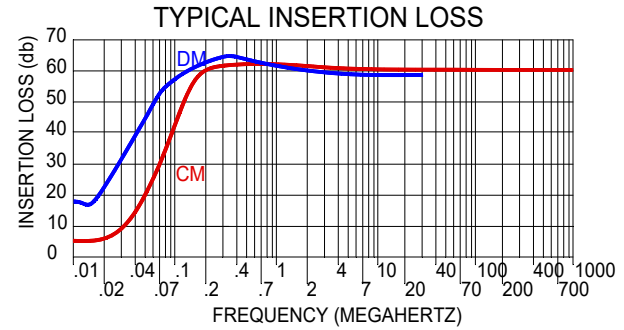

INPUT VOLTAGE: 115 Vac, 3PH DELTA
 OPERATING FREQUENCY: 50 - 400 Hz
 MAXIMUM CURRENT: 40A / PHASE
 MAXIMUM PEAK VOLTAGE LINE - LINE: 600V
 OPERATING TEMPERATURE: -40 TO 50-C
 STORAGE TEMPERATURE: -55 TO 100C
 LEAKAGE CURRENT: 1.1mA MAX. @ 115V, 60HZ
 DISCHARGE VOLTAGE FROM 160V PK AFTER 6.5 SEC: 35 VOLTS MAX
 DIELECTRIC WITHSTANDING (LINE- GRD): 1500 Vac FOR 1 MINUTE
 DIELECTRIC WITHSTANDING (LINE - LINE): 1500 Vdc FOR 1 MINUTE
 DC RESISTANCE: 90 MILLIOHM MAX

MS3102R24-22P

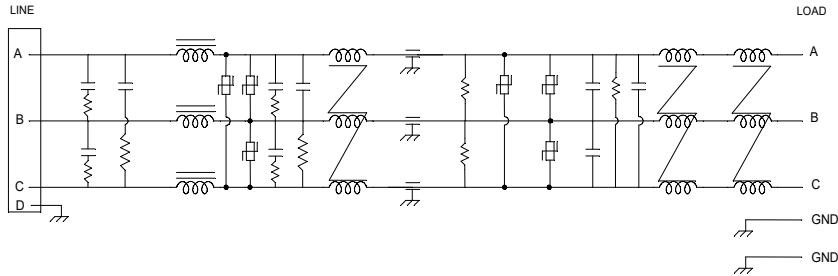

SCALE	APPROVED BY	DRWN BY CYNTHIA GOMEZ
DATE 09/27/13		REV DATE 5/12/16
SPECIFICATION		REVISION B
TOLERANCE .XX = .01 .XXX = .005	DRAWING NO. ZK-2128-40B	
DIM: INCHES (mm)		