


Operating Voltage = 20 - 33 Vdc
 Operating Current = 120A
 Operating Temperature Range = -40° - 71°C
 Temp. Range (Storage) = -40° - 100°C
 Diel. Withstanding Voltage (Line-Case) = 1500 Vdc
 TVS Breakdown Voltage = 35 - 38.6 V
 Transient energy Handling Capability = 28 joules
 Max Clamping Voltage @ 3.2KA,
 (10/350 us) = 56 volts

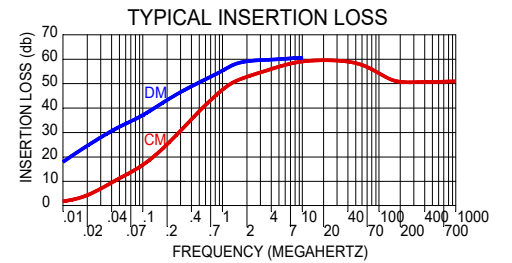

SCALE	APPROVED BY	DRWN BY RDW
DATE 5/28/20		REV DATE 8/11/2020
SPECIFICATION		REVISION D
TOLERANCE .XX = .01 .XXX = .005	DRAWING NO. ZM-2438-120	
DIM: INCHES (mm)		