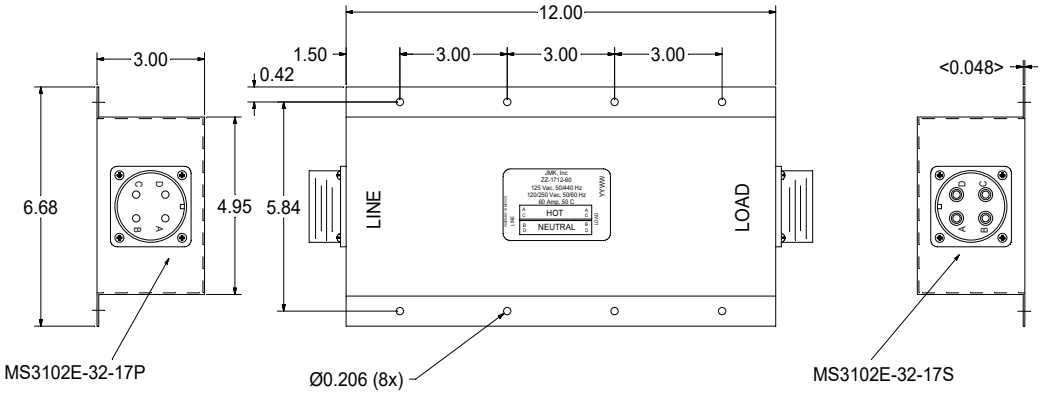

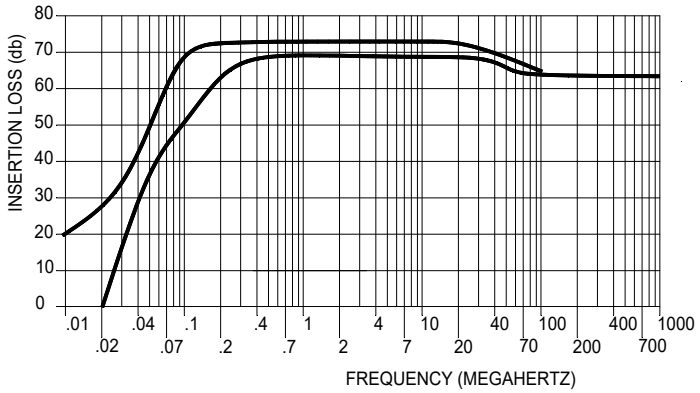

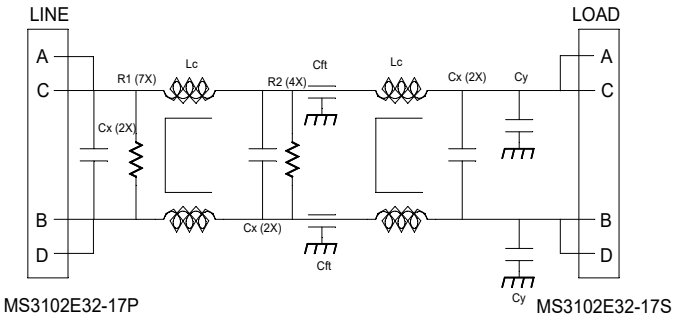

INPUT VOLTAGE: 125 Vac, 50/400 Hz
120/250 Vac, 50/60 Hz
OPERATING FREQUENCY: 50 - 400 Hz
MAXIMUM CURRENT: 60A
OPERATING TEMPERATURE: -20 TO 50C
STORAGE TEMPERATURE: -20 TO 100C
DIEL. WITHSTAND (LINE - CASE); 1500 NRMS FOR 1.0 MINUTE
DIEL WITHSTAND (LINE - LINE): 1500 VDC FOR 1.0 MINUTE
LEAKAGE CURRENT: 8.5 mA MAX. @ 250V, 50HZ
33.5 mA MAX. @125V, 400HZ

JMK, Inc.

SCALE -	APPROVED BY	DRWN BY	RDW
DATE 4/15/04		REV DATE	01/21/14

SPECIFICATION — REVISION F

TOLERANCE .XX = .02
.XXX = .005
DIM: INCHES (mm)

DRAWING NO. ZZ-1712-60