

Specifications,


DC Section:

Max operating Voltage: 100 Vdc  
 Max operating current: 30 Ampere  
 Max operating temperature: -40 to 85 deg. C  
 Max storage Temperature: -55 to 125 deg. C  
 Hi-Pot time to case: 300 Vdc for 1 minute w/o varistors installed  
 Varistor surge voltage (95 - 127) V  
 Max clamp volt: 250 V  
 Max energy dissipation: 18 J


AC Section:

Max operating Voltage: 150 Vac  
 Max operating current: 3 Ampere  
 Max operating temperature: -40 to 85 deg. C  
 Max storage Temperature: -55 to 125 deg. C  
 Hi-Pot time to case: 1500 Vac for 1 minute w/o varistors installed  
 Max Leakage current: 1.2 mA @ 250Vac, 60 Hz.  
 Discharge Time: 30V max after 3.5 seconds with 125Vac applied.  
 Varistor surge voltage (212 - 268) V  
 Max clamp volt: 395 V  
 Max energy dissipation: 40 J

ZZ-2305-30 INSERTION LOSS - DC SECTION

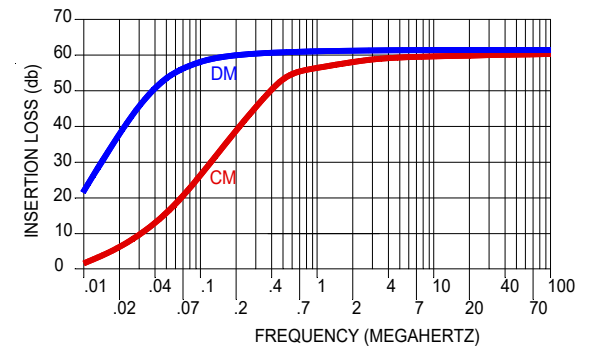

ZZ-2305-30 INSERTION LOSS - AC SECTION

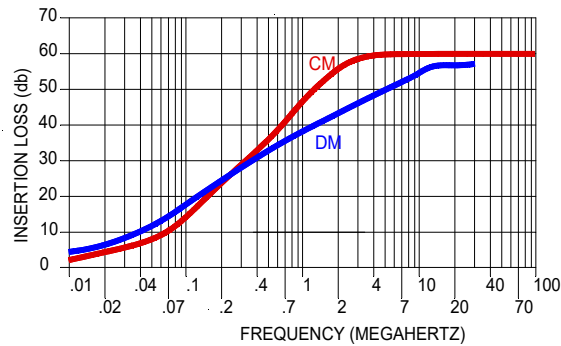

SHEET 1 OF 3

SCALE	APPROVED BY	DRWN BY	RDW
DATE 4/27/2106		REV DATE	8/8/2016
<b>SPECIFICATION</b>			REVISION <b>B</b>
TOLERANCE .XX = .01 .XXX = .005		DRAWING NO. <b>ZZ-2305-30</b>	
DIM: INCHES (mm)			